

TORQUE TOOL SPECIALIST



EHS SERIES ELECTRIC TORQUE WRENCH
STRAIGHT OR *RIGHT ANGLE*

BOLTING PROBLEM SOLVERS SINCE 2004

TEL : 1-484-951-6628

SALES : BOLTING@NIBTORQUE.COM

FAX : 1-866-780-9316



WEB : WWW.NIBTORQUE.COM

EHS SERIES

EXTREME DUTY ELECTRIC TORQUE

SPEED

THE **FASTEST** TORQUE TOOL EVER...PERIOD!

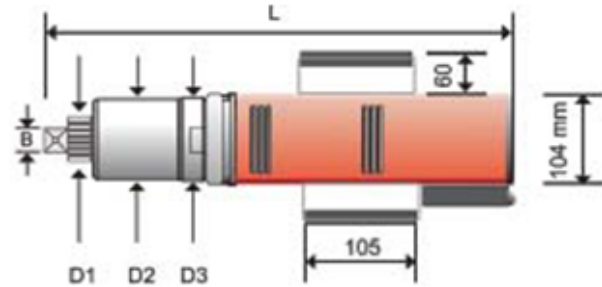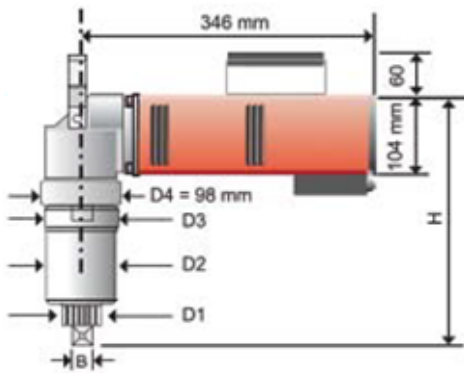


NIB MODEL NUMBER		1550	2000	2300	3150	4550	5750	7200	15000	31000
		1550-P	2000-P	2300-P	3150-P	4550-P	5750-P	7200-P	15000-P	31000-P
Torque rang approx.	Nm	300-2100	435-2695	500-3100	900-4250	1100-6150	1800-7800	2050-9800	5300-20600	6240-42120
	ft-lbs	221-1550	320-1980	370-2280	663-3130	811-4530	1320-5750	1500-7220	3900-15200	4600-31000
B Square Drive		1"	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	2 1/2"	2 1/2"
D1 Diameter approx.	mm	54	54	72	72	72	72	91	SW120	SW120
D2 Diameter	mm	85	85	98	98	123	148	173	275	275
D3 Diameter	mm	88	88	88	88	123	148	173	98	130
Length	mm	515	515	515	525	550	555	555	650	650
Weight	kg	13	13	14	14.5	19	22	27	60	62
Idle Speed approx	rpm	16	14	12	8	7	4	3	1	0.6

BRUSHLESS MAINTENANCE FREE ELECTRIC MOTOR ACCEPTS FROM 60-360V ACCURACY +/- 3%

STANDARD CONTROL

**YOU CHOOSE
THE CONTROLS!**

PLUS+ CONTROL



19 PRE-SET SETTINGS
AUTO SHUTOFF WHEN TORQUE IS REACHED

19 PRE-SET SETTINGS
AUTO SHUTOFF WHEN TORQUE IS REACHED
OPTIONAL ADDITIONAL 19 PRE-SET SETTINGS
TORQUE PLUS ANGLE OR ANGLE ONLY IN DEGREES
LCD SCREEN FOR ALL MODES

