

TORQUE TOOL SPECIALIST



1-484-951-6628



ETC SERIES ELECTRIC TORQUE WRENCH
STRAIGHT OR *RIGHT ANGLE*

BOLTING PROBLEM SOLVERS SINCE 2004

TEL : 1-484-951-6628

SALES : BOLTING@NIBTORQUE.COM

FAX : 1-866-780-9316

WEB : WWW.NIBTORQUE.COM

ETC SERIES



ELECTRIC TORQUE WRENCHES




STRAIGHT OR OPTIONAL RIGHT ANGLE MODELS

		ETC-330	ETC-620	ETC-920	ETC-1550	ETC-2065	ETC-2650	ETC-3690
Torque Range*	Nm	60-450	150-840	200-1250	400-2100	500-2800	660-3600	900-5000
	Ft-Lbs	45-330	110-620	150-920	296-1550	370-2065	490-2650	660-3690
Square Drive	B	3/4"	3/4"	3/4" 1"	1"	1"	1-1/2"	1-1/2"
Diameter D1	Aprox mm	41	41	41/54	54	54	72	72
Diameter D2	Aprox mm	85	85	85	85	85	98	105
Diameter D3	Aprox mm	88	88	88	88	88	98	110
Length	L mm	330	330	375	375	382	400	438
Weight	Lbs	19.4	19.4	22.0	22.0	23.3	27.5	39.2
Idlespeed	Rpm	19	12	8	7	6	4	2

UNIVERSAL ELECTRIC MOTOR ACCEPTS 60-360V ACCURACY +/- 3%

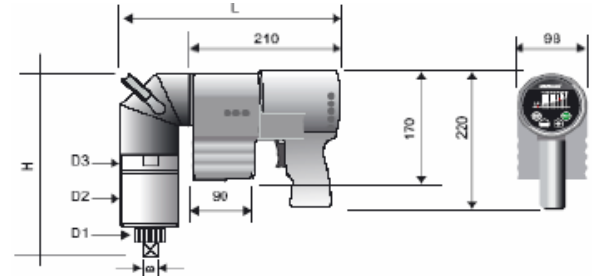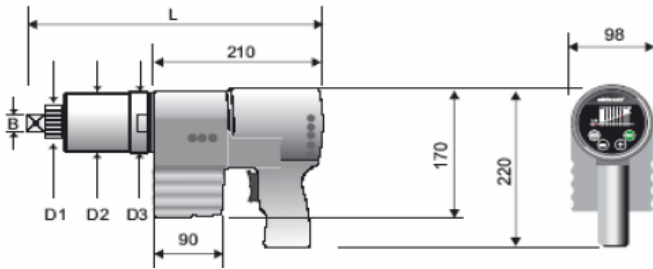


STANDARD CONTROL



19 PRE-SET SETTINGS
AUTO SHUTOFF WHEN TORQUE IS REACHED

YOU CHOOSE THE CONTROLS!

PLUS+ CONTROL



19 PRE-SET SETTINGS
AUTO SHUTOFF WHEN TORQUE IS REACHED
OPTIONAL ADDITIONAL 19 PRE-SET SETTINGS
TORQUE PLUS ANGLE OR ANGLE ONLY IN DEGREES
LCD SCREEN FOR ALL MODES

